Rev 1	10,13'04	First release

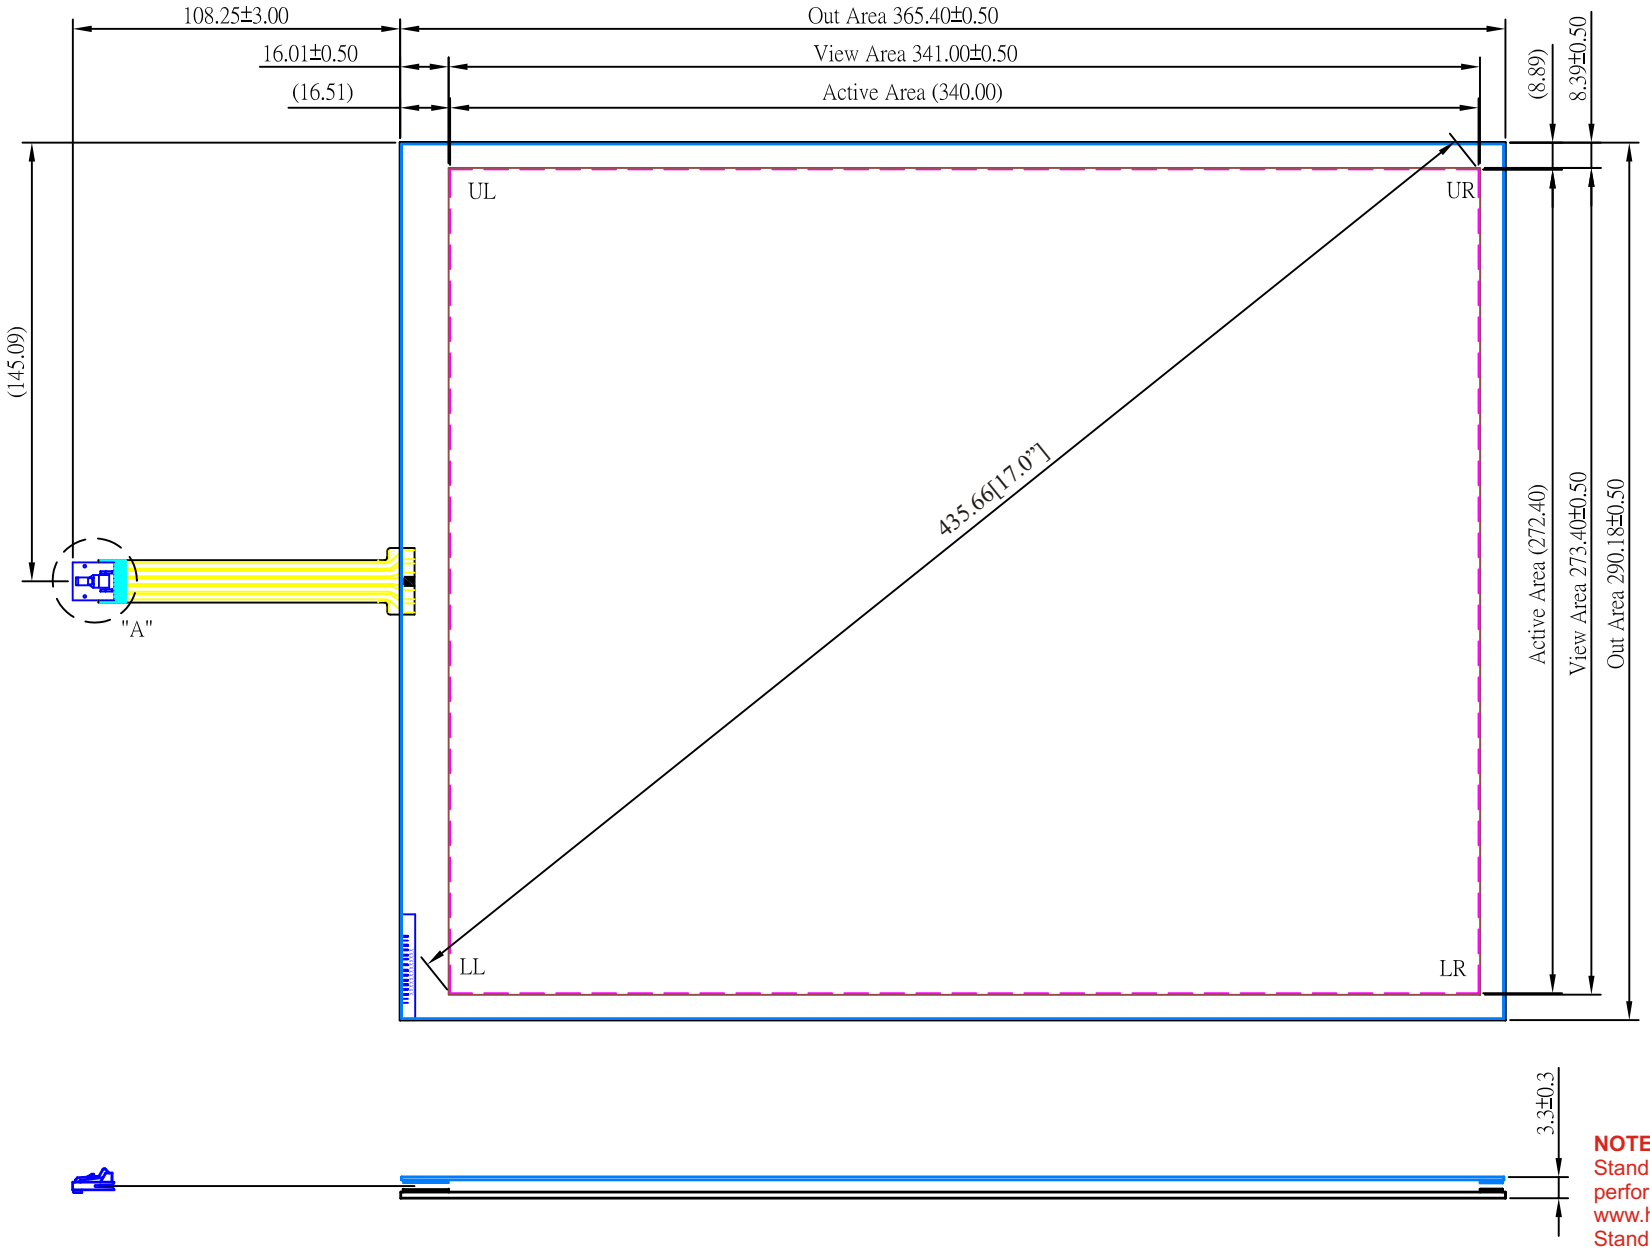



DETAIL A

Pin Out	
1	UR
2	UL
3	SENSE
4	LL
5	LR

NOTE: The HantouchUSA Incoming Inspection Standard is part of this drawing. This quality and performance document can be viewed at: www.hantouchUSA.com, under Incoming Inspection Standards.

NOTES:

1. TOPSHEET HARDCOAT IS ANTI-GLARE
2. GLASS THICKNESS 2.8mm
3. FLEXTAIL DO NOT BEND TO LESS THAN 3.175mm RADIUS
4. OVERALL SENSOR THICKNESS IS 3.3±0.3mm
5. SENSOR INPUT BY PEN / FINGER
6. 5 PIN AMP CONNECTOR, LATCH STYLE HOUSING P/N:487526-4 OR EQUIVALENT

APPROVED		UNITS	mm	PROJECTION	DRAWING NO.	REV.
CHECKED		SCALE	NONE		HT1715-ETNAA28	0
DESIGN		HantouchUSA Touch Screen Specialists			DESCRIPTION 17.0" 5-Wire Touch Panel	SHEET
DRAWN	J.H. LEE					1/1