


NOTE: The Hantouch USA 5 wire incoming inspection document is part of this drawing. It can be viewed at www.hantouchusa.com, under incoming inspection standards.

MARK	HISTORY	DATE	NAME
△			

RoHS Compliant

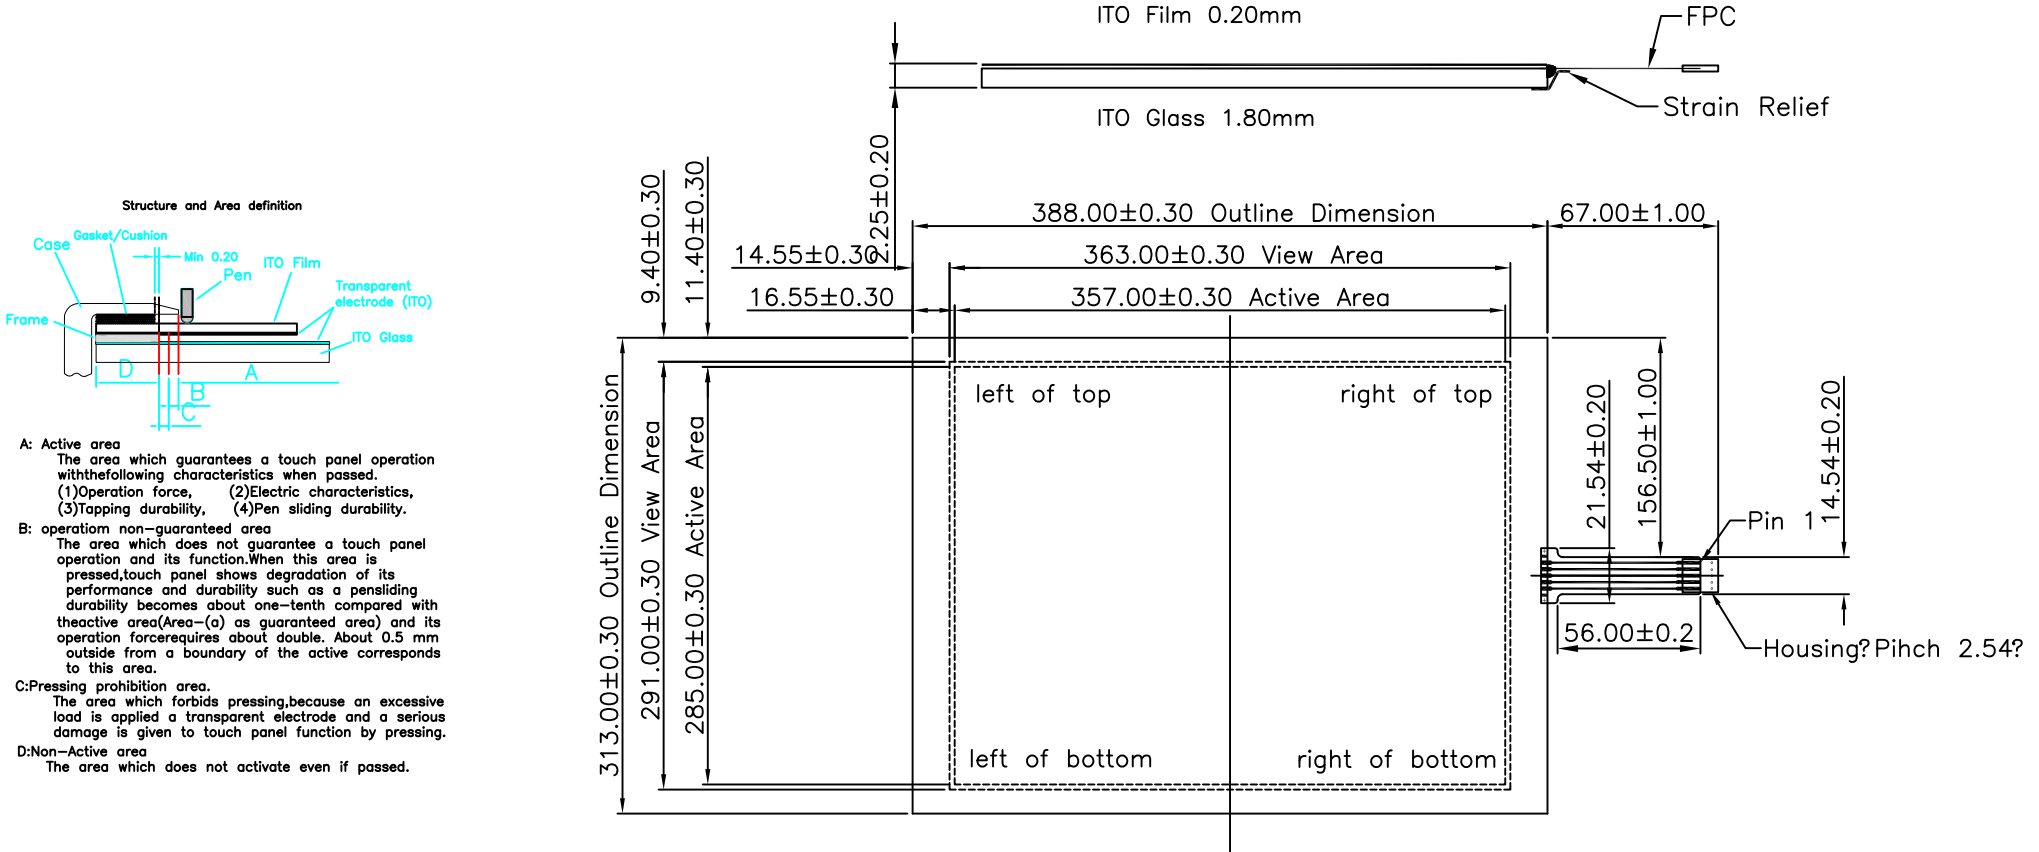

NOTES:

1. Operation Temperature: -10° C ~ +60° C.
Storage Temperature: -20° C ~ +70° C.
2. Life Time: >35,000,000 times.
3. ITO Film: Sheet Resistance 450±50Ω;
ITO Glass: Sheet Resistance 500±50Ω.
4. Tail Type :FPC
5. Unspecified Tolerance :±0.20

Pin#	Assignment
1	left of top
2	right of top
3	common
4	right of bottom
5	left of bottom

HTU-1818-IN-W5R				SHEET	A 4	SCALE	Ver.1
				1 of 1	mm	1:1	
DESIGN		DATE		HANTOUCH USA www.hantouchusa.com 866.378.7358			
CHECK		DATE					