


**NOTE: The Hantouch USA incoming inspection standard is part of this drawing. This quality and performance document can be viewed at: [www.hantouchusa.com](http://www.hantouchusa.com), under incoming inspection documents**

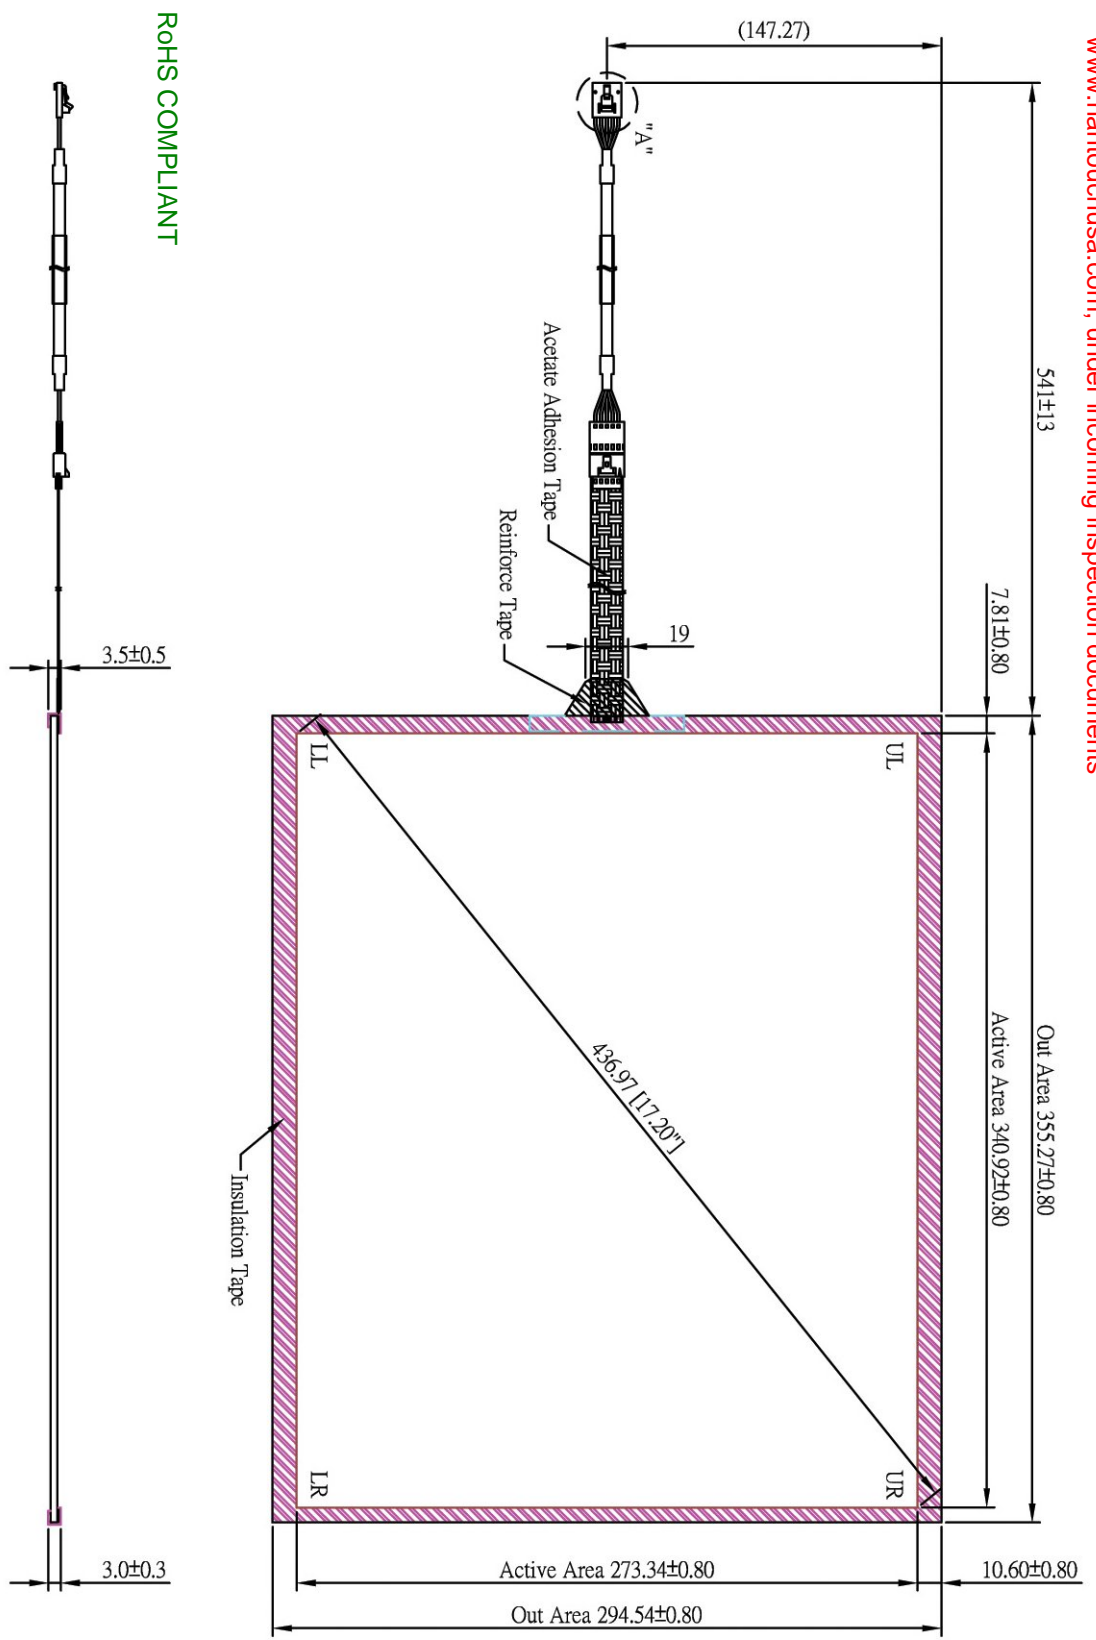


**ROHS COMPLIANT**

- Notes:
1. GLASS OPTICAL CHARACTERISTIC IS POLISH
  2. TOPSHEET GLASS THICKNESS 2.8mm
  3. FLEXTAIL DO NOT BEND TO LESS THAN 3.175mm RADIUS
  4. TAIL ACCEPTS 2.54mm PITCH
  5. INSULATION TAPE : POLYESTER TAPE , TOTAL THICKNESS 0.063mm , BLACK
  6. REINFORCE TAPE : POLYESTER TAPE , TOTAL THICKNESS 0.1mm , BLACK
  7. ACETATE ADHESION TAPE : TOTAL THICKNESS 0.25mm , BLACK
  8. 5 PIN AMP CONNECTOR, LATCH STYLE HOUSING PN:104257-4 OR EQUIVALENT

Third Angle Projection		Dimensions	m/m
Drawn By		Scale	FREE
Checked By		Release Date	08.31.05

Pin Out	
1	UR
2	UL
3	SHIELD
4	LL
5	LR



**HANTOUCH USA**

Drawing Number HT172C-ETCAE28