



NOTE: The Hantouch USA incoming inspection standard is part of this drawing.  
 This quality and performance document can be viewed at:  
[www.hantouchusa.com](http://www.hantouchusa.com), under incoming inspection documents

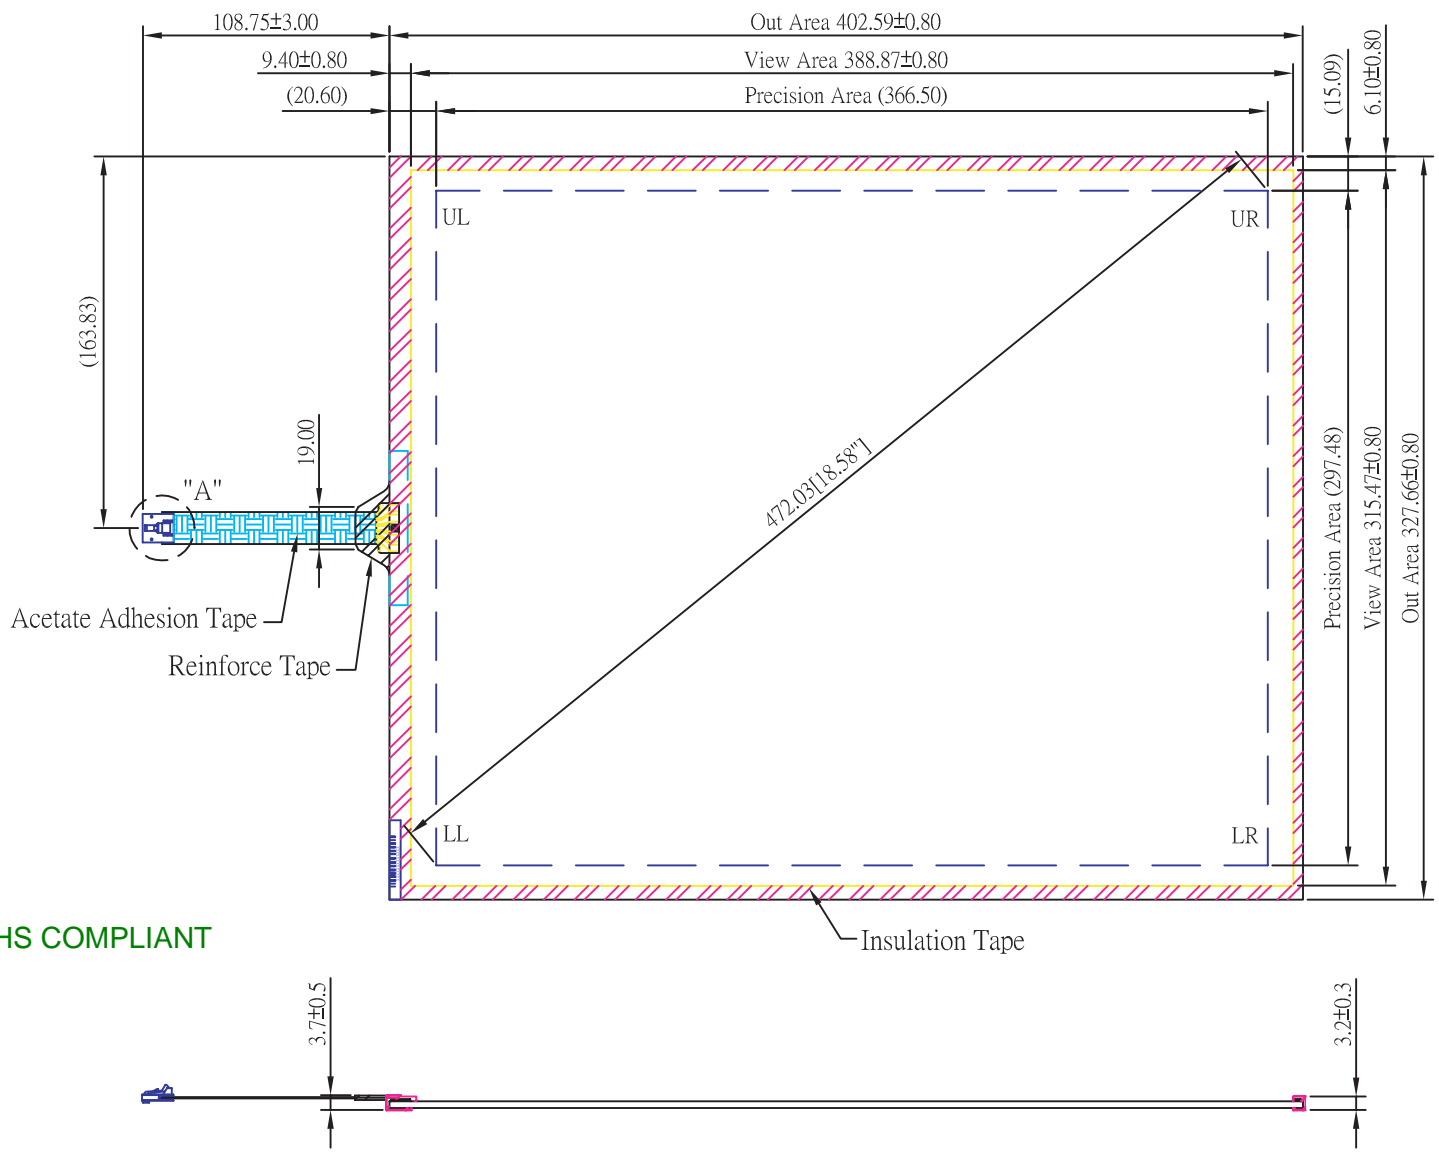

RoHS COMPLIANT

Pin Out	
1	UR
2	UL
3	SHIELD
4	LL
5	LR

- NOTES:
- GLASS OPTICAL CHARACTERISTIC IS ANTI-GLARE
  - TOPSHEET GLASS THICKNESS 3.0mm
  - FLEXTAIL DO NOT BEND TO LESS THAN 3.175mm RADIUS
  - TAIL ACCEPTS 2.54mm PITCH
  - INSULATION TAPE : POLYESTER TAPE , TOTAL THICKNESS 0.063mm , BLACK
  - REINFORCE TAPE : POLYESTER TAPE , TOTAL THICKNESS 0.1mm , BLACK
  - ACETATE ADHESION TAPE : TOTAL THICKNESS 0.25mm , BLACK
  - 5 PIN AMP CONNECTOR, LATCH STYLE HOUSING P/N:487526-4 OR EQUIVALENT

THIRD ANGLE PROJECTION		Dimensions m/m
Drawn by J.H.LEE	Scale FREE	
Checked by	Release Date 01,10'05	

**HANTOUCH USA**

Drawing Number **HT190C-ETCAB28**