
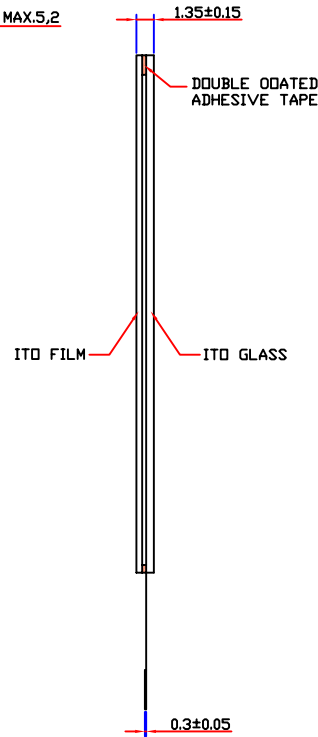


NOTE: The HantouchUSA Incoming Inspection Standard is part of this drawing.
 This quality and performance document can be viewed at:
www.hantouchUSA.com, under Incoming Inspection Standards.

RoHS Compliant


REMARK

1. Glass Thk: 1.1mm
2. Film Type: Anti-Glare
3. Total Thk: 1.35 ± 0.15 mm
4. Linearity: $\pm 1.8\%$ or less
5. Transmittance: 80% or more
6. Resistance
 $200 < X \text{ (FILM)} < 900 \text{ ohm}$
 $200 < Y \text{ (GLASS)} < 900 \text{ ohm}$
7. Connector: FPC
8. General Tolerance: ± 0.5 mm

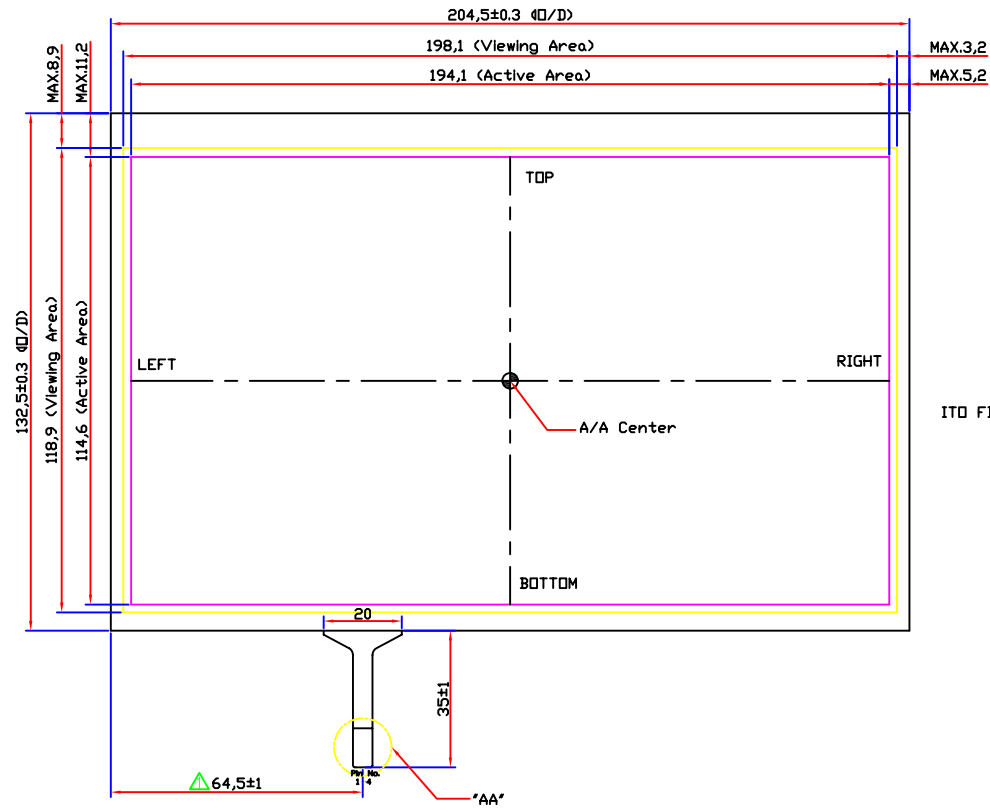


CIRCUIT DIAGRAM

SIGNAL ASSIGNMENT

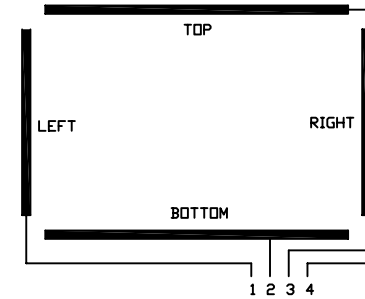

Detail "AA"

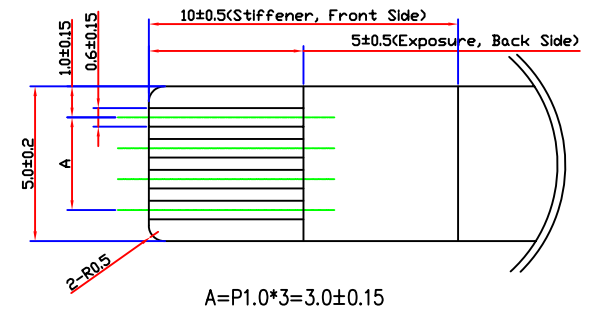

Web-Site @
www.hantouchusa.com

APPROVE						UNIT	mm	PROJECTION	DRAWING NO.	REV.
1	Change FPC	07.09.13	H. JU		Y. J. OH	CHECK	SCALE	NONE	H3089A-NDNBB37	1
0	NEW DRAW	07.09.12	H. JU		Y. J. OH	DESIGN			DESCRIPTION	SHEET
REV.No.	REVISED	DATE	DRAWN	CHECKED	APPROVED	DRAW	 Touch Screen Specialists		8.9" TOUCH PANEL	1/1