
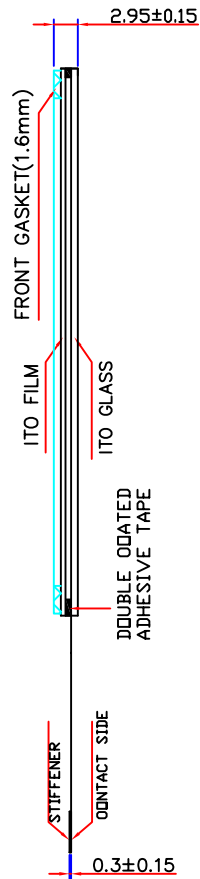


NOTE: The HantouchUSA Incoming Inspection Standard is part of this drawing. This quality and performance document can be viewed at: www.hantouchUSA.com, under Incoming Inspection Standards.

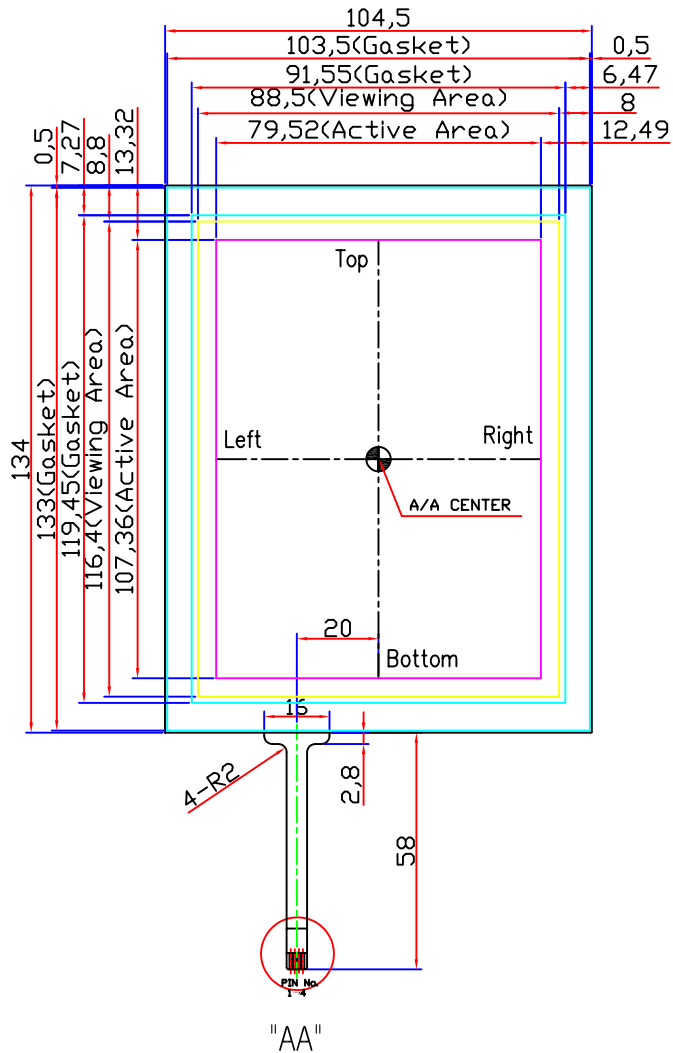


REMARK

RoHS Compliant

1. Glass Thk: 1.1mm
2. Film Type: Non-Glare
3. Total Thk: 2.95 ± 0.15 mm
4. Linearity: $\pm 1.8\%$ or less
5. Transmittance: 80% or more
6. Resistance
 $200 < \text{Glass(Y)} < 900 \text{ ohm}$
 $200 < \text{Film(X)} < 900 \text{ ohm}$
7. Connector: FPC
8. General Tolerance: ± 0.3


CIRCUIT DIAGRAM

SIGNAL ASSIGNMENT



Pin No	Signal
1	Left
2	Bottom
3	Right
4	Top

Detail "AA"

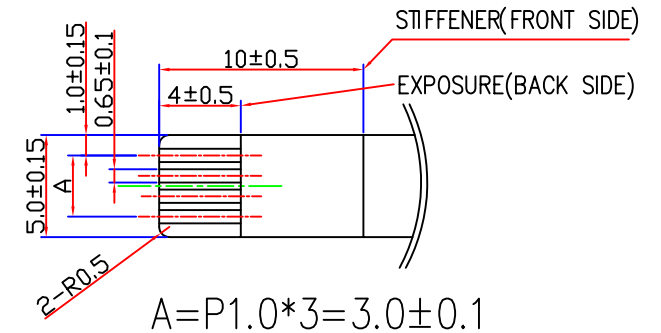

Web-Site @ www.hantouchusa.com

REV.No.	REVISION	DATE	DRAWN	CHECKED	APPROVED
0	NEW DRAW	05.10.24	H.Y.LM		

APPROVE	STD.TOL	UNIT	mm	DRAWING NO.	REV.
CHECK	± 0.3	SCALE	NONE	H4053A-NDOFD60-F	
DESIGN				DESCRIPTION	SHEET
DRAW				5.3" TOUCH PANEL	1/1

HantouchUSA
Touch Screen Specialists