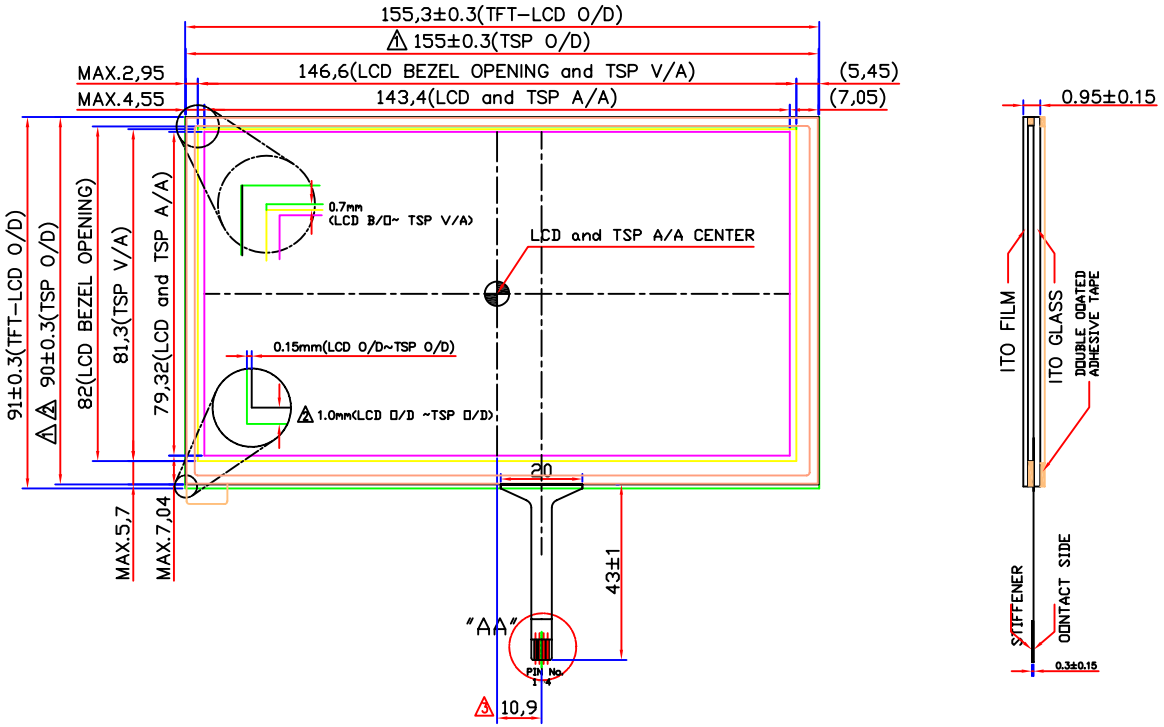

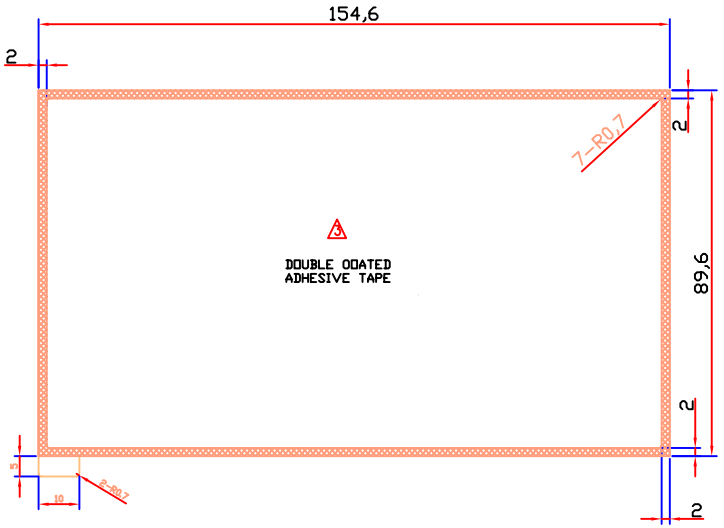

NOTE: The HantouchUSA Incoming Inspection Standard is part of this drawing. This quality and performance document can be viewed at: www.hantouchUSA.com, under Incoming Inspection Standards.

REMARK

RoHS Compliant

1.Glass Thk: 0.7mm
2.Film Type: Non-Glare
3.Total Thk: 0.95±0.15mm
4.Linearity: ±1.5% or less
5.Transmittance: 80% or more
6.Resistance
100<Glass(Y)<1200 ohm
100<Film(X)<1200 ohm
7.Connector: FPC

CIRCUIT DIAGRAM

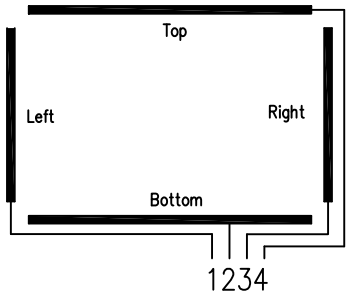

SIGNAL ASSIGNMENT

Pin No	Signal
1	Left
2	Bottom
3	Right
4	Top

Detail "AA"

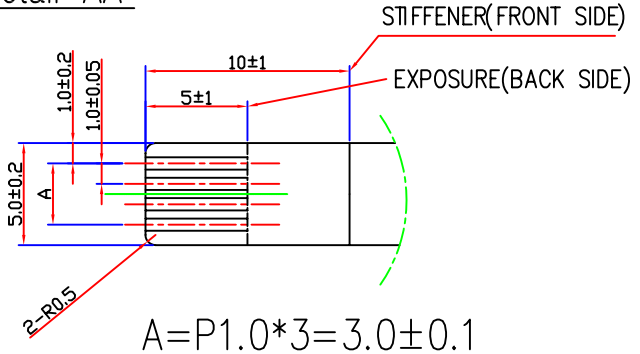

A=P1.0*3=3.0±0.1

REV.No.	REVISED	DATE	DRAWN	CHECKED	APPROVED
03	△6 FPC 위치 변경 배면테이프 치수 변경	05.12.08	K.B.KIM		
02	△5 TSP O/D CHANGE 前:0.5㎜ → 後:1.0㎜	05.10.14	J.H.LEE	K.B.KIM	J.H.AHN
01	△1 TSP O/D CHANGE	05.10.13	J.H.LEE	K.B.KIM	J.H.AHN
00	NEW DRAW	05.10.07	H.Y.IM	K.B.KIM	

DESIGN		STD.TOL	UNIT	mm	DRAWING NO. H5065A-NCOFG45-R
DRAW		±0.3	SCALE	NONE	REV.
APPROVE		CHECK			DESCRIPTION 6.5" TOUCH PANEL
					SHEET 1/1

HantouchUSA
Touch Screen Specialists

Web-Site @
www.hantouchusa.com