


REMARK

RoHS Compliant

1. Glass Thk: 1.1mm
2. Film Type: Non_Glare
3. Total Thk: 1.35±0.15mm
4. Linearity: ±1.8% or less
5. Transmittance: 80% or more
6. Resistance
 200<Glass(Y)<900 ohm
 200<Film(X)<900 ohm
7. Connector: FPC


CIRCUIT DIAGRAM

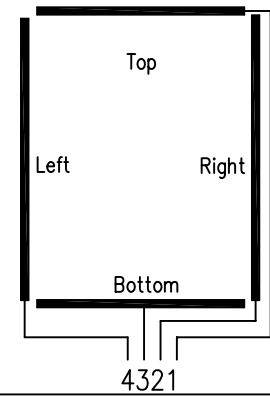

SIGNAL ASSIGNMENT

| Pin No. | Signal |
|---------|--------|
| 1 | Top |
| 2 | Right |
| 3 | Bottom |
| 4 | Left |

Detail "AA" (Scale=3/1) ⚠

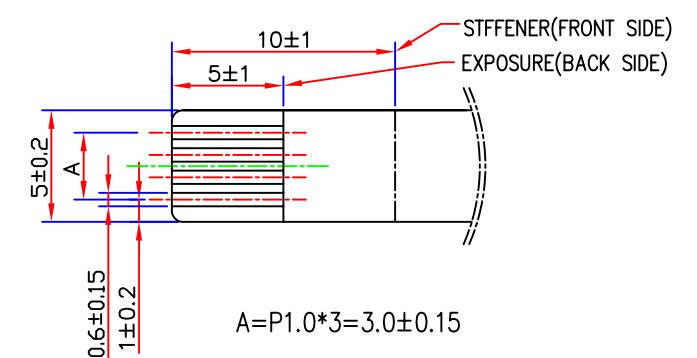

NOTE: The HantouchUSA Incoming Inspection Standard is part of this drawing. This quality and performance document can be viewed at: www.hantouchUSA.com, under Incoming Inspection Standards.

Web-Site @ www.hantouchusa.com

| | | | | | |
|---------|-------|------|------------|-----------------|-------|
| APPROVE | UNIT | mm | PROJECTION | DRAWING NO. | REV. |
| CHECK | SCALE | NONE | | H7038A-NDOFD52 | |
| DESIGN | | | | DESCRIPTION | SHEET |
| DRAW | | | | 3.8 TOUCH PANEL | 1/1 |

| REV.No. | REVISED | DATE | DRAWN | CHECKED | APPROVED | DRAW |
|---------|------------|----------|----------|----------|----------|--------|
| 0 | FPC CHANGE | 07.04.13 | H.Y. IM | K.B. KIM | Y. J. OH | CHECK |
| | NEW DRAW | 04.12.20 | J.H. LEE | | | DESIGN |