


REMARK


1. Glass Thk: 0.7mm
2. Film Type: Non-Glare
3. Total Thk: 0.95±0.15mm
4. Linearity: ±1.5 or less
5. Transmittance: 80% or more
6. Resistance
 $100 < X < 1200 \text{ ohm}$
 $100 < Y < 1200 \text{ ohm}$
7. Connector: FPC
8. General Tolerance: ±0.3mm

CIRCUIT DIAGRAM

SIGNAL ASSIGNMENT

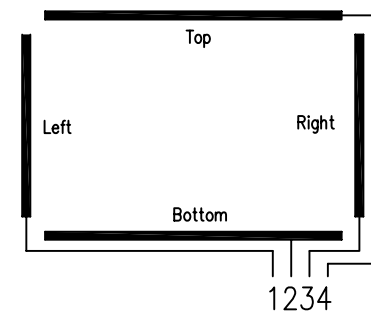

Detail "AA" (Scale=3/1)

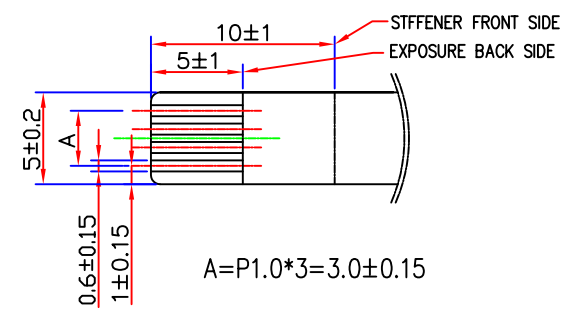

NOTE: The HantouchUSA Incoming Inspection Standard is part of this drawing. This quality and performance document can be viewed at: www.hantouchusa.com, under Incoming Inspection Standards.

Web-Site @ www.hantouchusa.com

REV.No.	REVISION	DATE	DRAWN	CHECKED	APPROVED	DRAW	UNIT	mm	PROJECTION	DRAWING NO.	REV.
1	△ FPC Change	06.05.22	H.Y.IM	J.H.LEE	J.W.AHN	CHECK	SCALE	NONE		H7043A-NCNB54-R	1
0	NEW DRAW	06.05.19	H.Y.IM	J.H.LEE	J.W.AHN	DESIGN				DESCRIPTION	SHEET
										4.3 TOUCH PANEL	1/1

HantouchUSA
Touch Screen Specialists