


REMARK

RoHS Compliant

1. Glass Thk :1.1mm
2. Film Type: Non\_Glare
3. Total Thk: 1.35±0.15mm
4. Linearity: ±1.8% or less
5. Transmittance: 80% or more
6. Resistance  
100<Glass(Y)<400 ohm  
400<Film(X)<900 ohm
7. Connector: FPC
8. General Tolerance: ±0.3
9. TFT-LCD: A00社(MODEL NAME:A070VW01)

CIRCUIT DIAGRAM

SIGNAL ASSIGNMENT

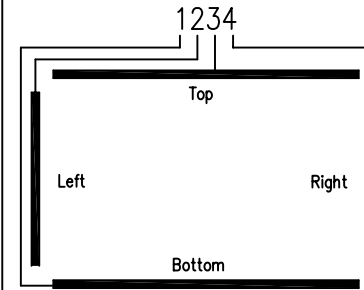


Pin No	Signal
1	Bottom
2	Left
3	Top
4	Right

Web-Site @  
[www.hantouchusa.com](http://www.hantouchusa.com)

NOTE: The HantouchUSA Incoming Inspection Standard is part of this drawing. This quality and performance document can be viewed at: [www.hantouchUSA.com](http://www.hantouchUSA.com), under Incoming Inspection Standards.

Detail "AA"(Scale=3/1)

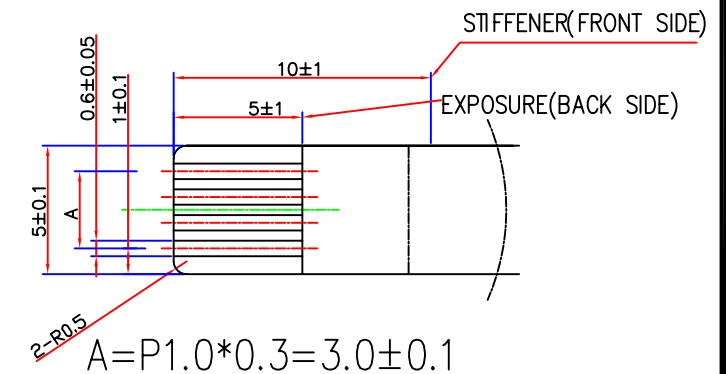

REV.No	REVISED	DATE	DRAWN	CHECKED	APPROVED	DRAW
3	Pin Assign Change Resistance Change	05.04.15	B. J. LEE		J. W. AHN	
2	REMARK (LCD MODEL 기입) 배면 TAPE DIM 기입	05.03.02	J. H. LEE	B. J. LEE	J. W. AHN	APPROVE
1	FPC POSITION CHANGE TSP DIM CHANGE	05.02.25	J. H. LEE	B. J. LEE	J. W. AHN	CHECK
0	NEW DRAW	05.02.21	J. H. LEE	B. J. LEE	J. W. AHN	DESIGN

APPROVE	STD.TOL	UNIT	mm	DRAWING NO.	REV.
	±0.3 <td>SCALE</td> <td>NONE</td> <td>H9070A-NDOFFP02-R</td> <td></td>	SCALE	NONE	H9070A-NDOFFP02-R	
<b>HantouchUSA</b> Touch Screen Specialists				DESCRIPTION	SHEET
				7.0" TOUCH PANEL	1/1