
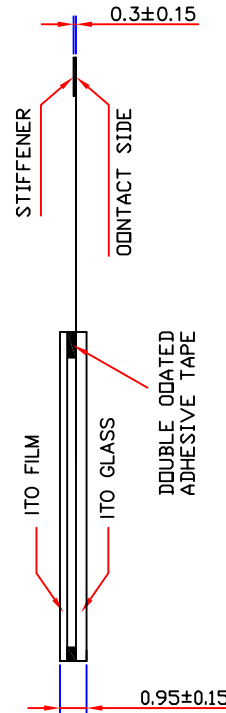


NOTE: The HantouchUSA Incoming Inspection Standard is part of this drawing.
 This quality and performance document can be viewed at:
www.hantouchUSA.com, under Incoming Inspection Standards.

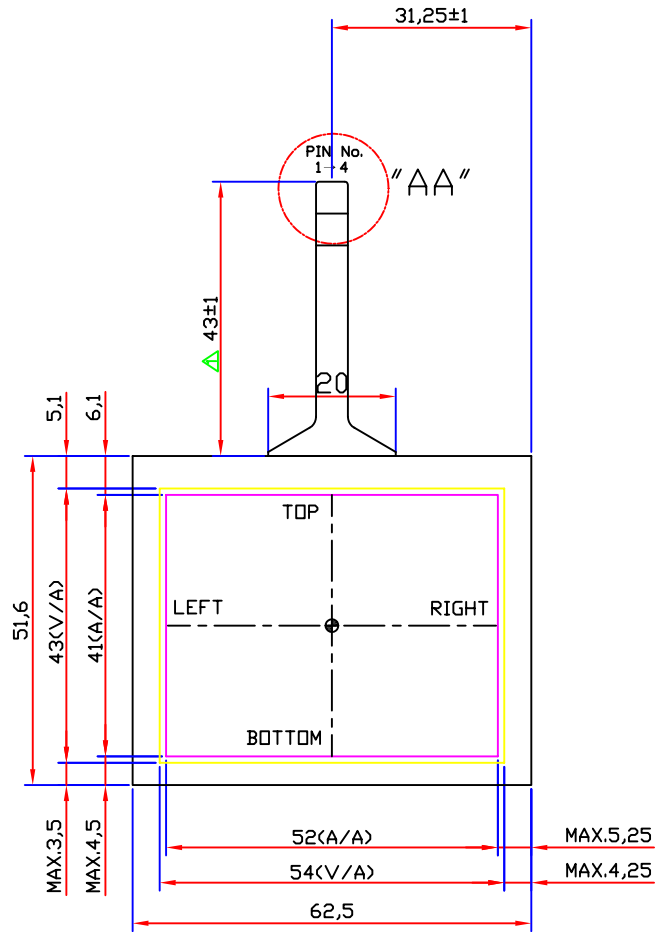


REMARK

RoHS Compliant

1. Glass Thk: 0.7mm
2. Film Type: Non-Glare
3. Total Thk: 0.95±0.15mm
4. Linearity: ±1.8% or less
5. Transmittance: 80% or more
6. Resistance
 $200 < Y < 900 \text{ ohm}$
 $200 < X < 900 \text{ ohm}$
7. Connector: FPC
8. General Tolerance: ±0.5


CIRCUIT DIAGRAM

SIGNAL ASSIGNMENT



Pin No	Signal
1	Bottom
2	Left
3	Top
4	Right

Detail "AA"

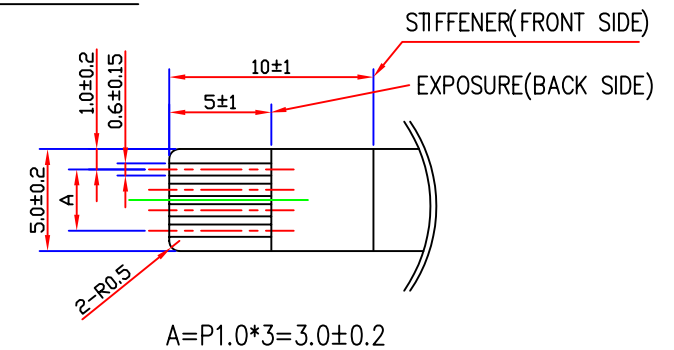

Web-Site @
www.hantouchusa.com

REV.No.	REVISED	DATE	DRAWN	CHECKED	APPROVED	DRAW	APPROVE	STD.TOL	UNIT	mm	DRAWING NO.	REV.
△	Changed FPC	07.05.10	H.Y. IM	K.B. KIM	Y. J. OH	CHECK			SCALE	NONE	HTO25A-NCIAG45	
0	NEW DRAW	05.10.14	H.Y. IM			DESIGN					DESCRIPTION	SHEET
						DRAW					2.5" TOUCH PANEL	1/1

HantouchUSA
 Touch Screen Specialists