


Web-Site @ www.hantouchusa.com


NOTE: The HantouchUSA Incoming Inspection Standard is part of this drawing. This quality and performance document can be viewed at: www.hantouchUSA.com, under Incoming Inspection Standards.

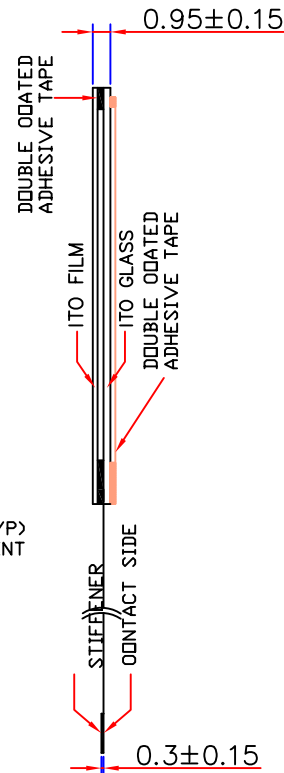

REMARK

- 1.Glass Thk: 0.7mm
- 2.Film Type: Non_Glare
- 3.Total Thk: 0.95±0.15mm
- 4.Linearity: ±1.8% or less
- 5.Transmittance: 80% or more
- 6.Resistance
200<Glass(Y)<900 ohm
200<Film(X)<900 ohm
- 7.Connector: FPC


CIRCUIT DIAGRAM



SIGNAL ASSIGNMENT

Pin No	Signal
1	Left
2	Bottom
3	Right
4	Top

Detail "AA"(Scale=3/1)

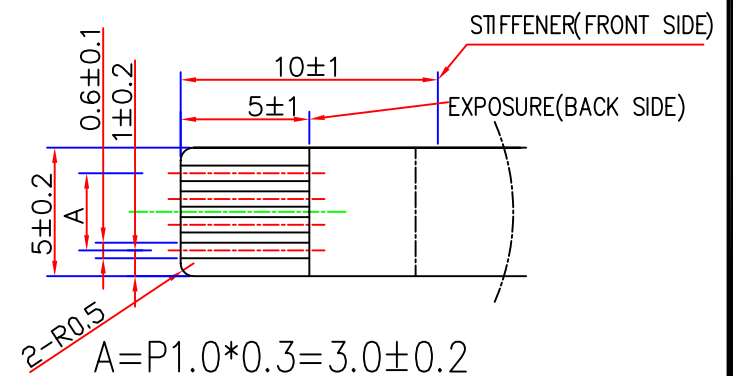

APPROVE	STD.TOL	UNIT	mm	DRAWING NO.	REV.
CHECK	±0.3	SCALE	NONE	HT036A-NCOFD62-R	
DESIGN				DESCRIPTION	SHEET
DRAW				3.6TOUCH PANEL	1/1

REV.No.	REVISED	DATE	DRAWN	CHECKED	APPROVED
1	FPC CHANGE	05.11.28	K.B.KIM		
0	NEW DRAW	05.01.06	J.H.LEE	B.J.LEE	J.H.AHN