


REMARK

1. Glass Thk: 1.1mm
2. Film Type: Non_Glare
3. Total Thk: 1.35±0.15mm
4. Linearity: ±1.5% or less
5. Transmittance: 80% or more
6. Resistance
200<Glass(Y)<900 ohm
200<Film(X)<900 ohm
7. Connector: FPC


CIRCUIT DIAGRAM



SIGNAL ASSIGNMENT

Pin No	Signal
1	Top
2	Right
3	Bottom
4	Left

Detail "AA"(Scale=3/1) ▲

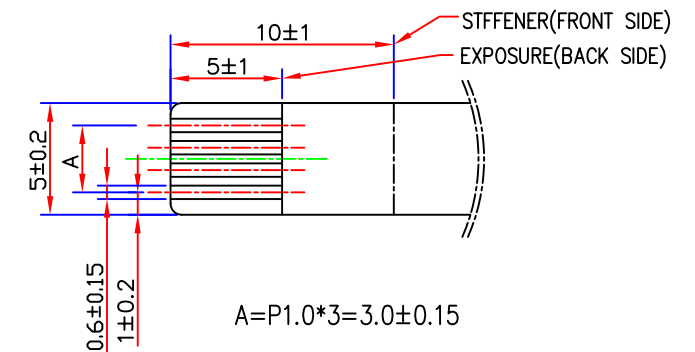

Web-Site @
www.hantouchusa.com

NOTE: The HantouchUSA Incoming Inspection Standard is part of this drawing.
This quality and performance document can be viewed at:
www.hantouchUSA.com, under Incoming Inspection Standards.

REV.No.	REVISED	DATE	DRAWN	CHECKED	APPROVED	DRAW	UNIT	mm	PROJECTION	DRAWING NO.	REV.
1	FPC CHANGE	07.04.13	H.Y. LIM	K.B. KIM	Y. J. OH	CHECK	SCALE	NONE		HT036A-ND0FD52	
0	NEW DRAW	04.12.17	J.H. LEE			DESIGN				DESCRIPTION	SHEET
						DRAW				3.6 TOUCH PANEL	1/1

Han touch USA
Touch Screen Specialists