

PRELIMINARY

NOTE: The HantouchUSA Incoming Inspection Standard is part of this drawing. This quality and performance document can be viewed at: www.hantouchUSA.com, under Incoming Inspection Standards.


REMARK

RoHS Compliant

1. Glass Thk: 1.1mm
2. Film Type: Non-Glare
3. Total Thk: 1.35 ± 0.15 mm
4. Linearity: ± 1.5 or less
5. Transmittance: 80% or more
6. Resistance
 - 100 < Y < 1200 ohm
 - 100 < X < 1200 ohm
7. Connector: FPC
8. General Tolerance: ± 0.3




CIRCUIT DIAGRAM

SIGNAL ASSIGNMENT



Pin No	Signal
1	Left
2	Top
3	Right
4	Bottom

Detail "AA"

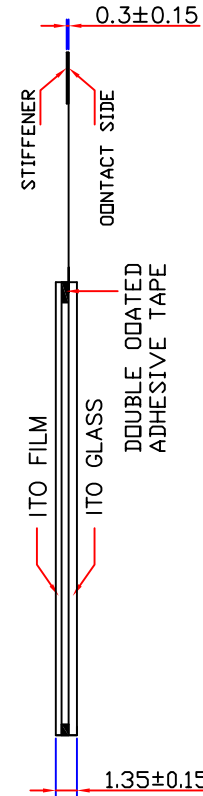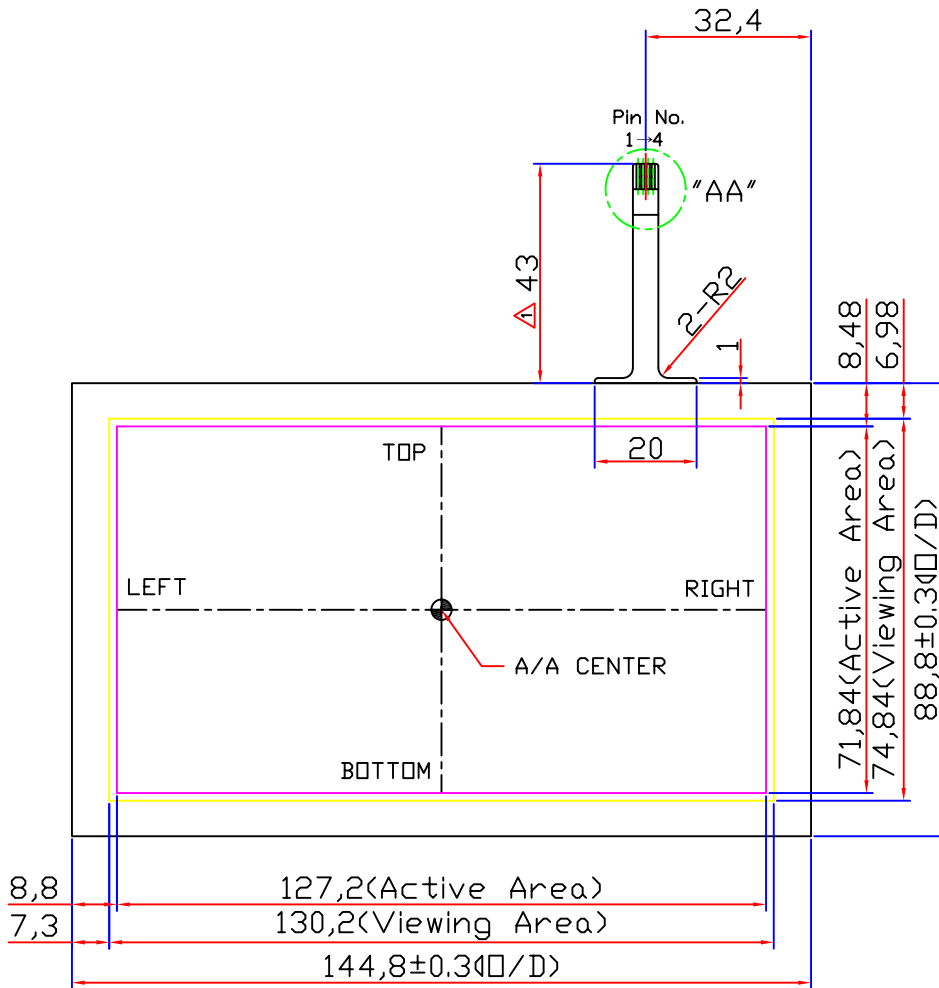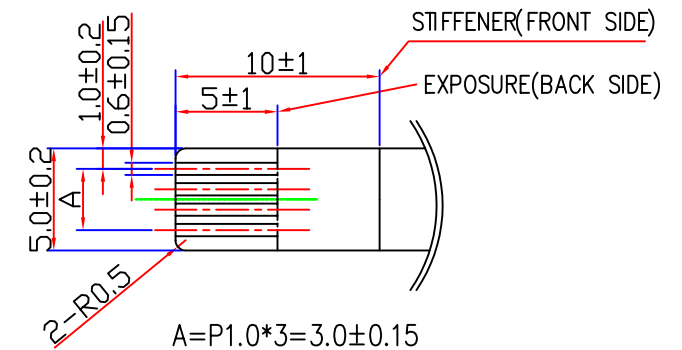

APPROVE	STD.TOL	UNIT	mm	DRAWING NO.	REV.
	± 0.3	SCALE	NONE	HT058A-NDOFH45	
				DESCRIPTION	SHEET
				5.8" TOUCH PANEL	1/1

Web-Site @ www.hantouchusa.com

REV.No.	REVISED	DATE	DRAWN	CHECKED	APPROVED	DRAW
1	Δ FPC Change	06.03.17	H.Y. IM	J.H. LEE	G.W. Park	CHECK
0	NEW DRAW	06.03.09	H.Y. IM	J.H. LEE	G.W. Park	DESIGN

Han touch USA
Touch Screen Specialists