


**NOTE:** The HantouchUSA Incoming Inspection Standard is part of this drawing.  
 This quality and performance document can be viewed at:  
[www.hantouchUSA.com](http://www.hantouchUSA.com), under Incoming Inspection Standards.

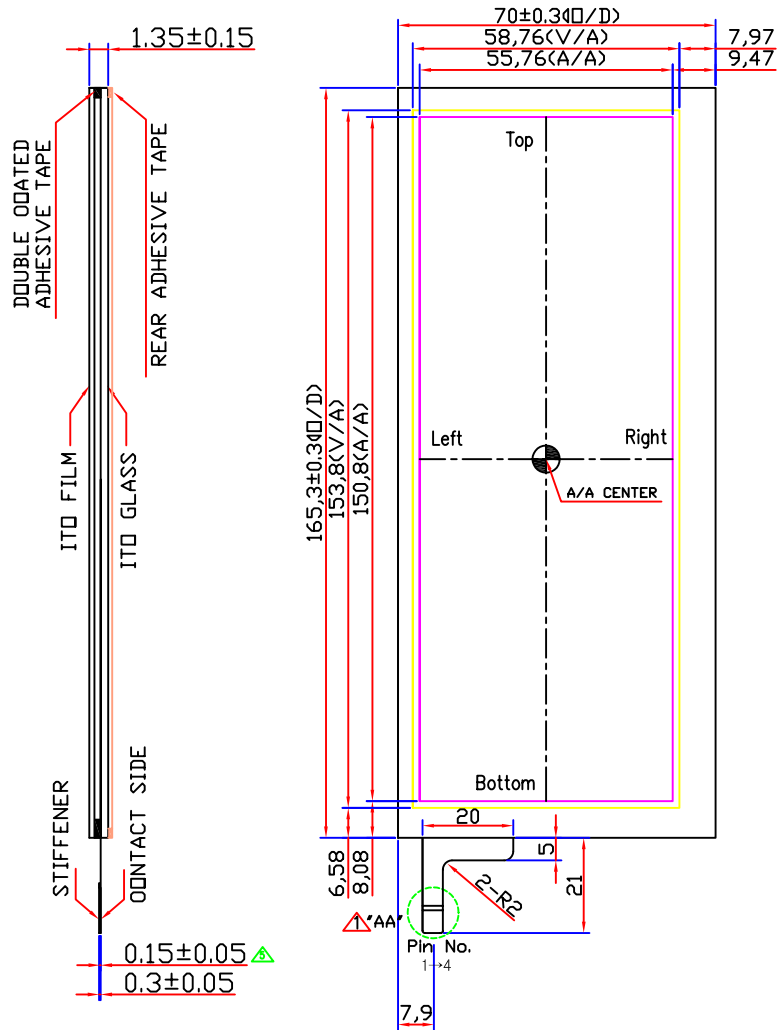


REMARK

**RoHS Compliant**

1. Glass Thk: 1.1mm
2. Film Type: Non-Glare
3. Total Thk: 1.35±0.15mm
4. Linearity: ±1.8% or less
5. Transmittance: 80% or more
6. Resistance  
 $50 < X < 500 \text{ ohm}$   
 $500 < Y < 1500 \text{ ohm}$
7. Connector: FPC
8. General Tolerance: ±0.3


CIRCUIT DIAGRAM



SIGNAL ASSIGNMENT

Pin No	Signal
1	Left
2	Bottom
3	Right
4	Top

Detail "AA"

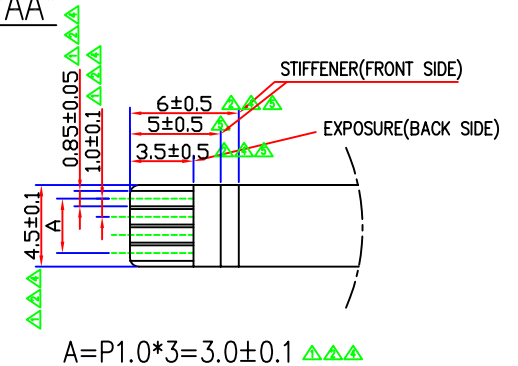

5	▲ FPC Exposure, Stiffener Change	07.01.24	H.Y. IM	K.B.KIM	Y.J.OH
4	▲ FPC Exposure, Tol. Change	07.01.10	H.Y. IM	K.B.KIM	Y.J.OH
3	▲ Tol. Change	06.12.27	H.Y. IM	K.B.KIM	M.G. JO
2	▲ Tol. Change	06.02.06	H.Y. IM		
1	▲ Tol. Change	06.02.06	H.Y. IM		
0	NEW DRAW	06.02.02	H.Y. IM		
REV.No.	REVISED	DATE	DRAWN	CHECKED	APPROVED

APPROVE	STD.TOL	UNIT	mm	DRAWING NO.	REV.
CHECK		SCALE	NONE	HT062A-NDOFB23-R	5
DESIGN	Han touch USA Touch Screen Specialists			DESCRIPTION	SHEET
DRAW				6.2" TOUCH PANEL	1/1