


# RoHS Compliant

## REMARK

1. Glass Thk: 1.1mm
2. Film Type: Non-Glare
3. Total Thk:  $1.35 \pm 0.15$
4. Linearity:  $\pm 1.5\%$  or less
5. Transmittance: 80% or more
6. Resistance  
 $200 < \text{Glass}(Y) < 1200 \text{ ohm}$   
 $200 < \text{Film}(X) < 900 \text{ ohm}$
7. Connector: FPC  
 (Thickness 110  $\rightarrow$  90 micron 이하)


### CIRCUIT DIAGRAM





### SIGNAL ASSIGNMENT

Pin No	Signal
1	Y1
2	X2
3	Y2
4	X1


### Detail "AA"

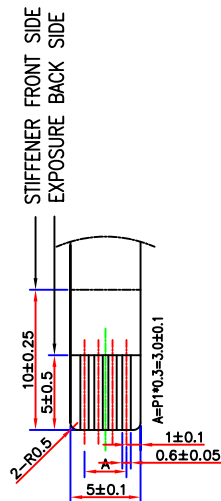

**NOTE:** The HantouchUSA Incoming Inspection Standard is part of this drawing. This quality and performance document can be viewed at: [www.hantouchUSA.com](http://www.hantouchUSA.com), under Incoming Inspection Standards.

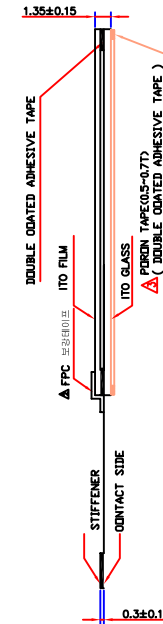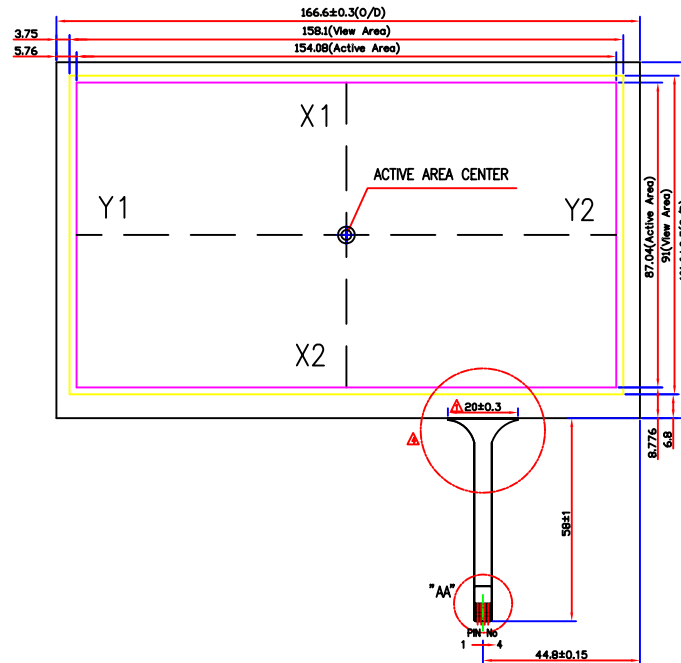

REV.NO.	REVISED	DATE	DRAWN	CHECKED	APPROVED
0	NEW DRAW	04.05.04	J.H.LEE		
1	FPC change 15mm $\rightarrow$ 20mm	04.05.25	J.H.LEE		
2	보광테이프 추가, FPC 두께변경	05.06.26	K.B.KIM		
3	배면테이프 추가 (PORON TYPE)	05.12.07	K.B.KIM		
4	FPC 모양변경	06.03.30	K.B.KIM		

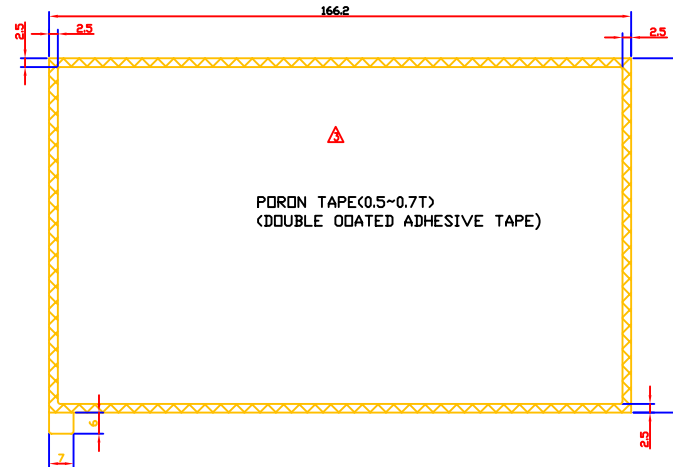

APPROVE	UNIT	mm	PROJECTION	DRAWING NO.	REV.
CHECK	SCALE	NONE		HT070A-ND0FE60-R	
DESIGN	 Touch Screen Specialists			DESCRIPTION	SHEET
DRAW				7.0 TOUCH PANEL	1/1

Web-Site @ [www.hantouchusa.com](http://www.hantouchusa.com)